PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(61) 1-4		THE THE COURT IN THE PARTY (PCI)		
(51) International Patent Classification 6:		(11) International Publication Number	11/0 00/40 400	
E21B 43/10, 43/08	A1	(12) Transfer I distribet	WO 98/49423	
		(43) International Publication Date:	5 November 1998 (05.11.98)	

(21) International Application Number: PCT/EP98/02577

(22) International Filing Date:

27 April 1998 (27.04.98)

(30) Priority Data:

97201267.8 28 April 1997 (28.04.97) ΕP (34) Countries for which the regional or international application was filed:

GB et al.

(71) Applicant (for all designated States except CA): SHELL INTERNATIONALE RESEARCH MAATSCHAPPU B.V. [NL/NL]; Carel van Bylandtlaan 30, NL-2596 HR The Hague (NL).

(71) Applicant (for CA only): SHELL CANADA LIMITED [CA/CA]; 400 - 4th Avenue S.W., Calgary, Alberta T2P 2H5 (CA).

(72) Inventor: DONNELLY, Martin; Badhuisweg 3, NL-1031 CM Amsterdam (NL).


(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FL, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LY, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FL, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: EXPANDABLE WELL SCREEN



(57) Abstract

An expandable well screen for preventing migration of sand or other solid particles into a hydrocarbon fluid production well comprises a number of filter sheets (3) with circumferential slots (6), which sheets (3) are secured in an iris-shaped configuration and co-axial to an expandable slotted carrier tube (1) such that as result of expansion of the tube (1) the amount of overlap between adjacent filter sheets (3) is reduced. The circumferential slot pattern of the slots (6) enables the filter sheets (3) to slide easily relative to each other and to avoid buckling and/or tearing of the filler sheets during the expansion process.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

1							••
AL	Albenia	88	Spajn	LS	Lesotho	ız	Slovenia
AM	Armenia	Pí	Finland	LT	Lithmania	SK	Slovakia
AT	Austria	FR	Prance	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LY	Latvia	SZ	Swaziland
AZ	Azorbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bossia and Herzegovina	GB	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BB	Belgium	GN	Guinea	MK	The former Yagoslav	TM	
BF	Burkina Paso	GR	Стессь	*****	Republic of Macedonia		Turkmenistan
BG	Bulgaria	HU	Hungary	ML	Mali	TR	Turkey
BJ	Benin	IE	keland	MN	Mongolia	TT	Trinidad and Tobago
BR	Brazil	IL	braci	MR		UA	Ukraino
BY	Belarus	18	lociand	MW	Mauritania	UG	Uganda
CA	Canada	I T	Italy		Malawi	US	United States of America
CDF	Central African Republic	лP	•	MX	Mexico	UZ	Usbekistan
cc	Congo	KR	Japan	NE	Niger	VN	Viet Nam
СН	Switzerland		Kenya	NL	Netherlands	YU	Yogoslavia
a		KÇ	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
Cυ	Cuba	KZ	Kazakatan	RO	Romania		
cz	Czech Republic	LC	Saint Lucia	RU	Ressian Pederation		
DE	Germany	u	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
B.E	Estonia	LR	Liberia	SG	Singapore		

WO 98/49423 PCT/EP98/02577

EXPANDABLE WELL SCREEN

The invention relates to an expandable well screen for preventing migration of solid particles into a hydrocarbon fluid production well.

More particularly, the invention relates to an expandable well screen which comprises a number of filter sheets which are secured in an iris-shaped configuration and co-axial to an expandable slotted carrier tube such that as a result of expansion of the tube the amount of overlap between adjacent filter sheets is reduced.

Such an expandable well screen is disclosed in applicant's co-pending international patent application PCT/EP96/04887.

Figure 3 of this prior art reference discloses that the filter sheets consist of plates in which a series of circular perforations are present. The size of these perforations is chosen such that solid particles larger than the size of the hole are prevented from flowing into the well.

A suitable expandable slotted carrier tube for use with the screen is disclosed in international patent application PCT/EP93/01460.

It has been found that filter sheets which are secured to an expandable slotted carrier tube are deformed considerably during the process of expanding the carrier tube by moving an expansion mandrel therethrough. The carrier tube normally shortens during the expansion process as a result of opening of the axial slots towards a diamond shape.

This may cause the filter sheets to buckle to accommodate the carrier tube shortening and friction

10

5

15

25

20

WO 98/49423 PCT/EP98/02577

between the overlapping filter sheets and the carrier tube or tubes may cause the filter sheets to tear.

An object of the present invention is to provide a well screen comprising an iris-shaped configuration of filter sheets which do not buckle and which slide easily relative to each other and relative to the carrier tube during the process of expanding the carrier tube.

5

10

15

20

25

30

The well screen according to the invention thereto comprises filter sheets having slots which are oriented in a substantially circumferential orientation with respect to the carrier tube.

When used in this specification the reference to a circumferential arrangement of slots means that the slots each are directed in a substantially tangential orientation with respect to the carrier tube and such the slots are oriented substantially transversal to the central axis and any axial slots of the carrier tube.

Preferably the filter sheets consist of elongate strips with staggered rows of slots in a transversal direction with respect to a longitudinal axis of each strip.

The pattern of slots is preferably such that alternate rows are displaced up to half a slot pitch in the transverse direction, the length of the slots is greater than half the transverse slot pitch, and the pattern of slots is continued through the longitudinal edges of the strips.

It is also preferred that each strip is secured at regularly spaced points along its length to the expandable slotted carrier tube and that each strip is secured to the expandable slotted carrier tube at said points by either spot welding, brazing, soldering, gluing, riveting or screwing the strip to the tube at each of said points.

These and further aspects, features and advantages ofthe well screen according to the present invention will become apparent from the accompanying claims, abstract and the following detailed description with reference to the drawings.

In the drawings:

5

10

15

20

25

30

35

Fig. 1 is a cross-sectional view of a well-screen comprising an iris-shaped configuration of filter sheets according to the invention;

Fig. 2 is a longitudinal sectional view of the well screen of Fig. 1;

Fig. 3 is a side view of the well screen of Fig. 1 and 2 in which the protective surrounding tube has been omitted; and

Fig. 4 and Fig. 4A, B, C and D show the original shape and deformation of the circumferential slots near a longitudinal edge of the filter sheets before, during and after the expansion process.

Referring now to Fig. 1 there is shown an expandable slotted carrier tube 1 which is surrounded by a well screen 2 which comprises a series of filter sheets 3 which are arranged in an iris-shaped configuration around the carrier tube 1. As shown in Fig. 2 and 3 the filter sheets 3 consist of elongate rectangular strips which are each, as shown in Fig. 1 secured to the carrier tube 1 at attachment points 4 located on or close to the longitudinal centreline of the filter sheet 3 by for example spot welding, brazing, soldering, gluing, riveting or screwing at regularly spaced points along the length of the carrier tube 1. The attachment points are located on the nodes between the ends of the slots of the carrier tube 1.

The filter sheets 3 overlap each other in both axial and circumferential direction such that during and after the expansion process which is illustrated in Fig. 4 at

5

10

15

20

25

30

35

least some overlap remains between adjacent filter sheets 3.

In Fig. 3 the protective surrounding tube 5 which is shown in Figs. 1 and 2 has been omitted to show that the filter sheets 3 each comprise a series of staggered rows of circumferential slots 6 which are oriented in a substantially tangential direction with respect to the carrier tube 1 and substantially transversal to the axial slots 7 of the carrier tube 1 and to the central axis 8 of the carrier tube 1.

PCT/EP98/02577

As shown in Fig. 4 the carrier tube 1 is expanded by an expansion cone 9 during the expansion process such that the axial slots 7 deform into a diamond shape.

The expansion causes the carrier tube 1 to shorten and as illustrated in Figs. 4A-D the circumferential slots 6 at and near the longitudinal edges of the filter sheets 3 will initially open up to the diamond shape shown in Fig. 4B, then close to the X-shape shown in Fig. 4C and then partly re-open again to the key-hole shape shown in Fig. 4D.

The illustrated sequential opening and closing of the circumferential slots 6 provides axial flexibility to the filter sheets 3 which prevents buckling or tearing of the fragile sheets 3 during expansion of the carrier tube 1.

The circumferential slots 6 also allow the overlapping sheets 3 to slide easily relative to each other during the expansion process.

It is observed that instead of arranging the filter sheets 3 in a longitudinal direction around the carrier tube 1 as illustrated in Fig. 3, the filter sheets 3 may also be arranged in a shallow helix around the carrier tube 1. In such case the helix angle should be selected small enough so that the deviation of the slots 6 from the tangential direction of the carrier tube 1 is less than 20 degrees.

5

10

15

20


CLAIMS


- 1. An expandable well screen for preventing migration of solid particles into a hydrocarbon fluid production well, which screen comprises a number of filter sheets which are secured in an iris-shaped configuration and co-axial to an expandable slotted carrier tube such that as a result of expansion of the tube the amount of overlap between adjacent filter sheets is reduced, wherein the filter sheets comprise slots which are oriented in a substantially circumferential orientation with respect to the carrier tube.
- 2. The well screen of claim 1, wherein the filter sheets consist of elongate strips with staggered rows of slots in a transversal direction with respect to a longitudinal axis of each strip.
- 3. The well screen of claim 2, wherein the pattern of slots is such that alternate rows are displaced up to half a slot pitch in the transverse direction, the length of the slots is greater than half the transverse slot pitch, and the pattern of slots is continued through the longitudinal edges of the strips.
- 4. The well screen of claim 3, wherein each strip is secured at regularly spaced attachment points along its length to the expandable slotted carrier tube.
- 5. The well screen of claim 4, wherein each strip is secured to the expandable slotted carrier tube at said attachment points by either spot welding, brazing, soldering, gluing, riveting or screwing the strip to the tube at each of said points.
- 30 6. The well screen of claim 5, wherein the regularly spaced attachment points are located on the nodes between


WO 98/49423 PCT/EP98/02577

the ends of the slots of the expandable slotted carrier $\stackrel{--}{}$ tube.


7. The well screen of claim 6, wherein the longitudinal axis of each strip is substantially parallel to a central axis of the carrier tube both before and after expansion of the carrier tube.

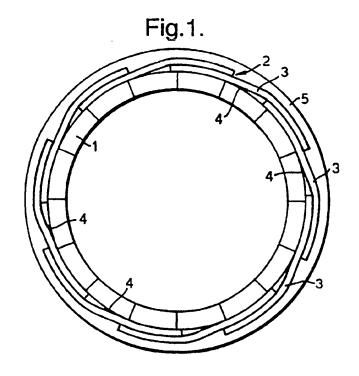

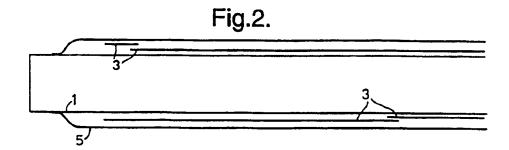

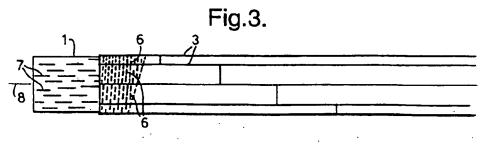

SUBSTITUTE SHEET (RULE 26)

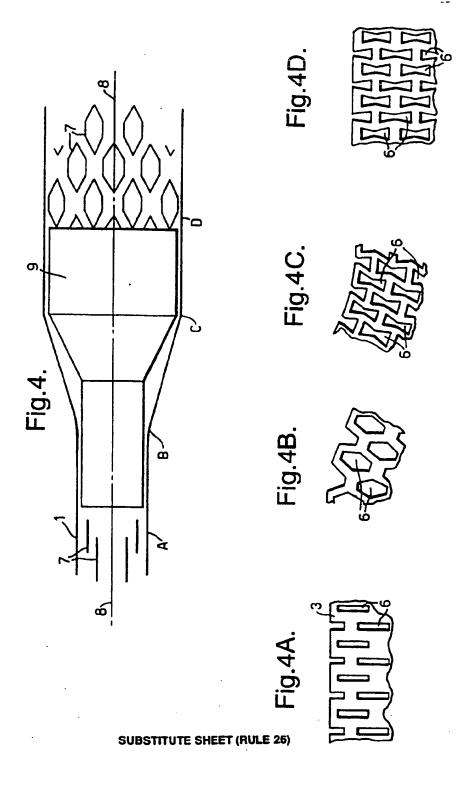

INTERNATIONAL SEARCH REPORT

Inter. Inal Application No PCT/EP 98/02577

A C 400	SEICATION OF CHE RECT WATERS		17 11 907 02377
ÎPC 6	SEPTICATION OF SUBJECT MATTER E21B43/10 E21B43/08		
According	to International Patent Classification (IPC) or to both national class	dication and IPC	
	SEARCHED	ELEGIOTI DE IF C	
Minimum d	ocumentation searched (classification system followed by classific	ation sympols)	
IPC 6	E218	•	
Documenta	ition searched other than minimum documentation to the extent the	M such documents are included in	the lields searched
Electronic o	data been considered division by		
	data base consulted during the international search (name of data	base and, where practical search	1 terms used)
C. DOCUM	ENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the	relevant passages	Relevant to claim No.
A,P	WO 97 17524 A (SHELL CANADA LTD RESEARCH (NL)) 15 May 1997 cited in the application see the whole document	;SHELL INT	1
A	US 3 353 599 A (V.N. SWIFT) 21 1967		1
	see column 4, line 70 - column see figure 5	5, line 10	
A	US 2 812 025 A (J.U. TEAGUE ET November 1957 see the whole document	1	
	 -		
Furth	ner documents are listed in the continuation of box C.	Patent family member	ra are listed in annex.
"A" docume conside "E" earlier d filling de "L" documen which is citation	regories of cited documents: Intri defining the general state of the art which is not send to be of particular relevance. Incument but published on or after the intermetional attempt of the published on or after the intermetional attempt of the published on priority claim(s) or as ofted to establish the publication date of another 1 or other special reason (as appollied) Int referring to an oral discipeure, use, exhibition or	cled to understand the prince invention "X" document of particular rele cannot be considered no involve an inventive step. "Y" document of particular rele cannot be considered to the cannot be	DUDÎVA ED ÎMMARÎNA MAR LIMAN MA
otnern Protocume	neans int published prior to the International filing date but an the priority date claimed	OCCULIABLE OF COURDINAGE AN	th one or more other such docu- being obvious to a person skilled
	actual completion of theinternational search	Cate of mailing of the inter	
20	O August 1998	28/08/1998	•
Name and m	nailing address of the ISA European Patent Office. P B. 5818 Patentiaan 2 NL - 2280 HV Rijawijk	Authorized officer	
· ·	Tel. (+31-70) 340-2040, Tx. 31 651 epo;ni, Fax: (+31-70) 340-3016	Schouten, A	

INTERNATIONAL SEARCH REPORT

information on patent family members

Inter. nel Application No PCT/EP 98/02577

ited in search report		date	member(s)	date
10 9717524	_ A	15-05-1997	AU 7568096 A 29	-05-1997
IS 3353599	Α	21-11-1967	NONE	
JS 2812025	Α	05-11-1957	NONE	
		US-11-195/	NONE	

Form PCT/ISA/210 (patent family annex) (July 1992)

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

BLACK BORDERS

IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

FADED TEXT OR DRAWING

BLURRED OR ILLEGIBLE TEXT OR DRAWING

SKEWED/SLANTED IMAGES

COLOR OR BLACK AND WHITE PHOTOGRAPHS

GRAY SCALE DOCUMENTS

LINES OR MARKS ON ORIGINAL DOCUMENT

REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

IMAGES ARE BEST AVAILABLE COPY.

☐ OTHER:

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.